


MAP OF PROPOSED DRAINAGE DISTRICT NO. 41 SAC 43 BUENA VISTA COUNTY STORM LAKE IOWA JULY 1912

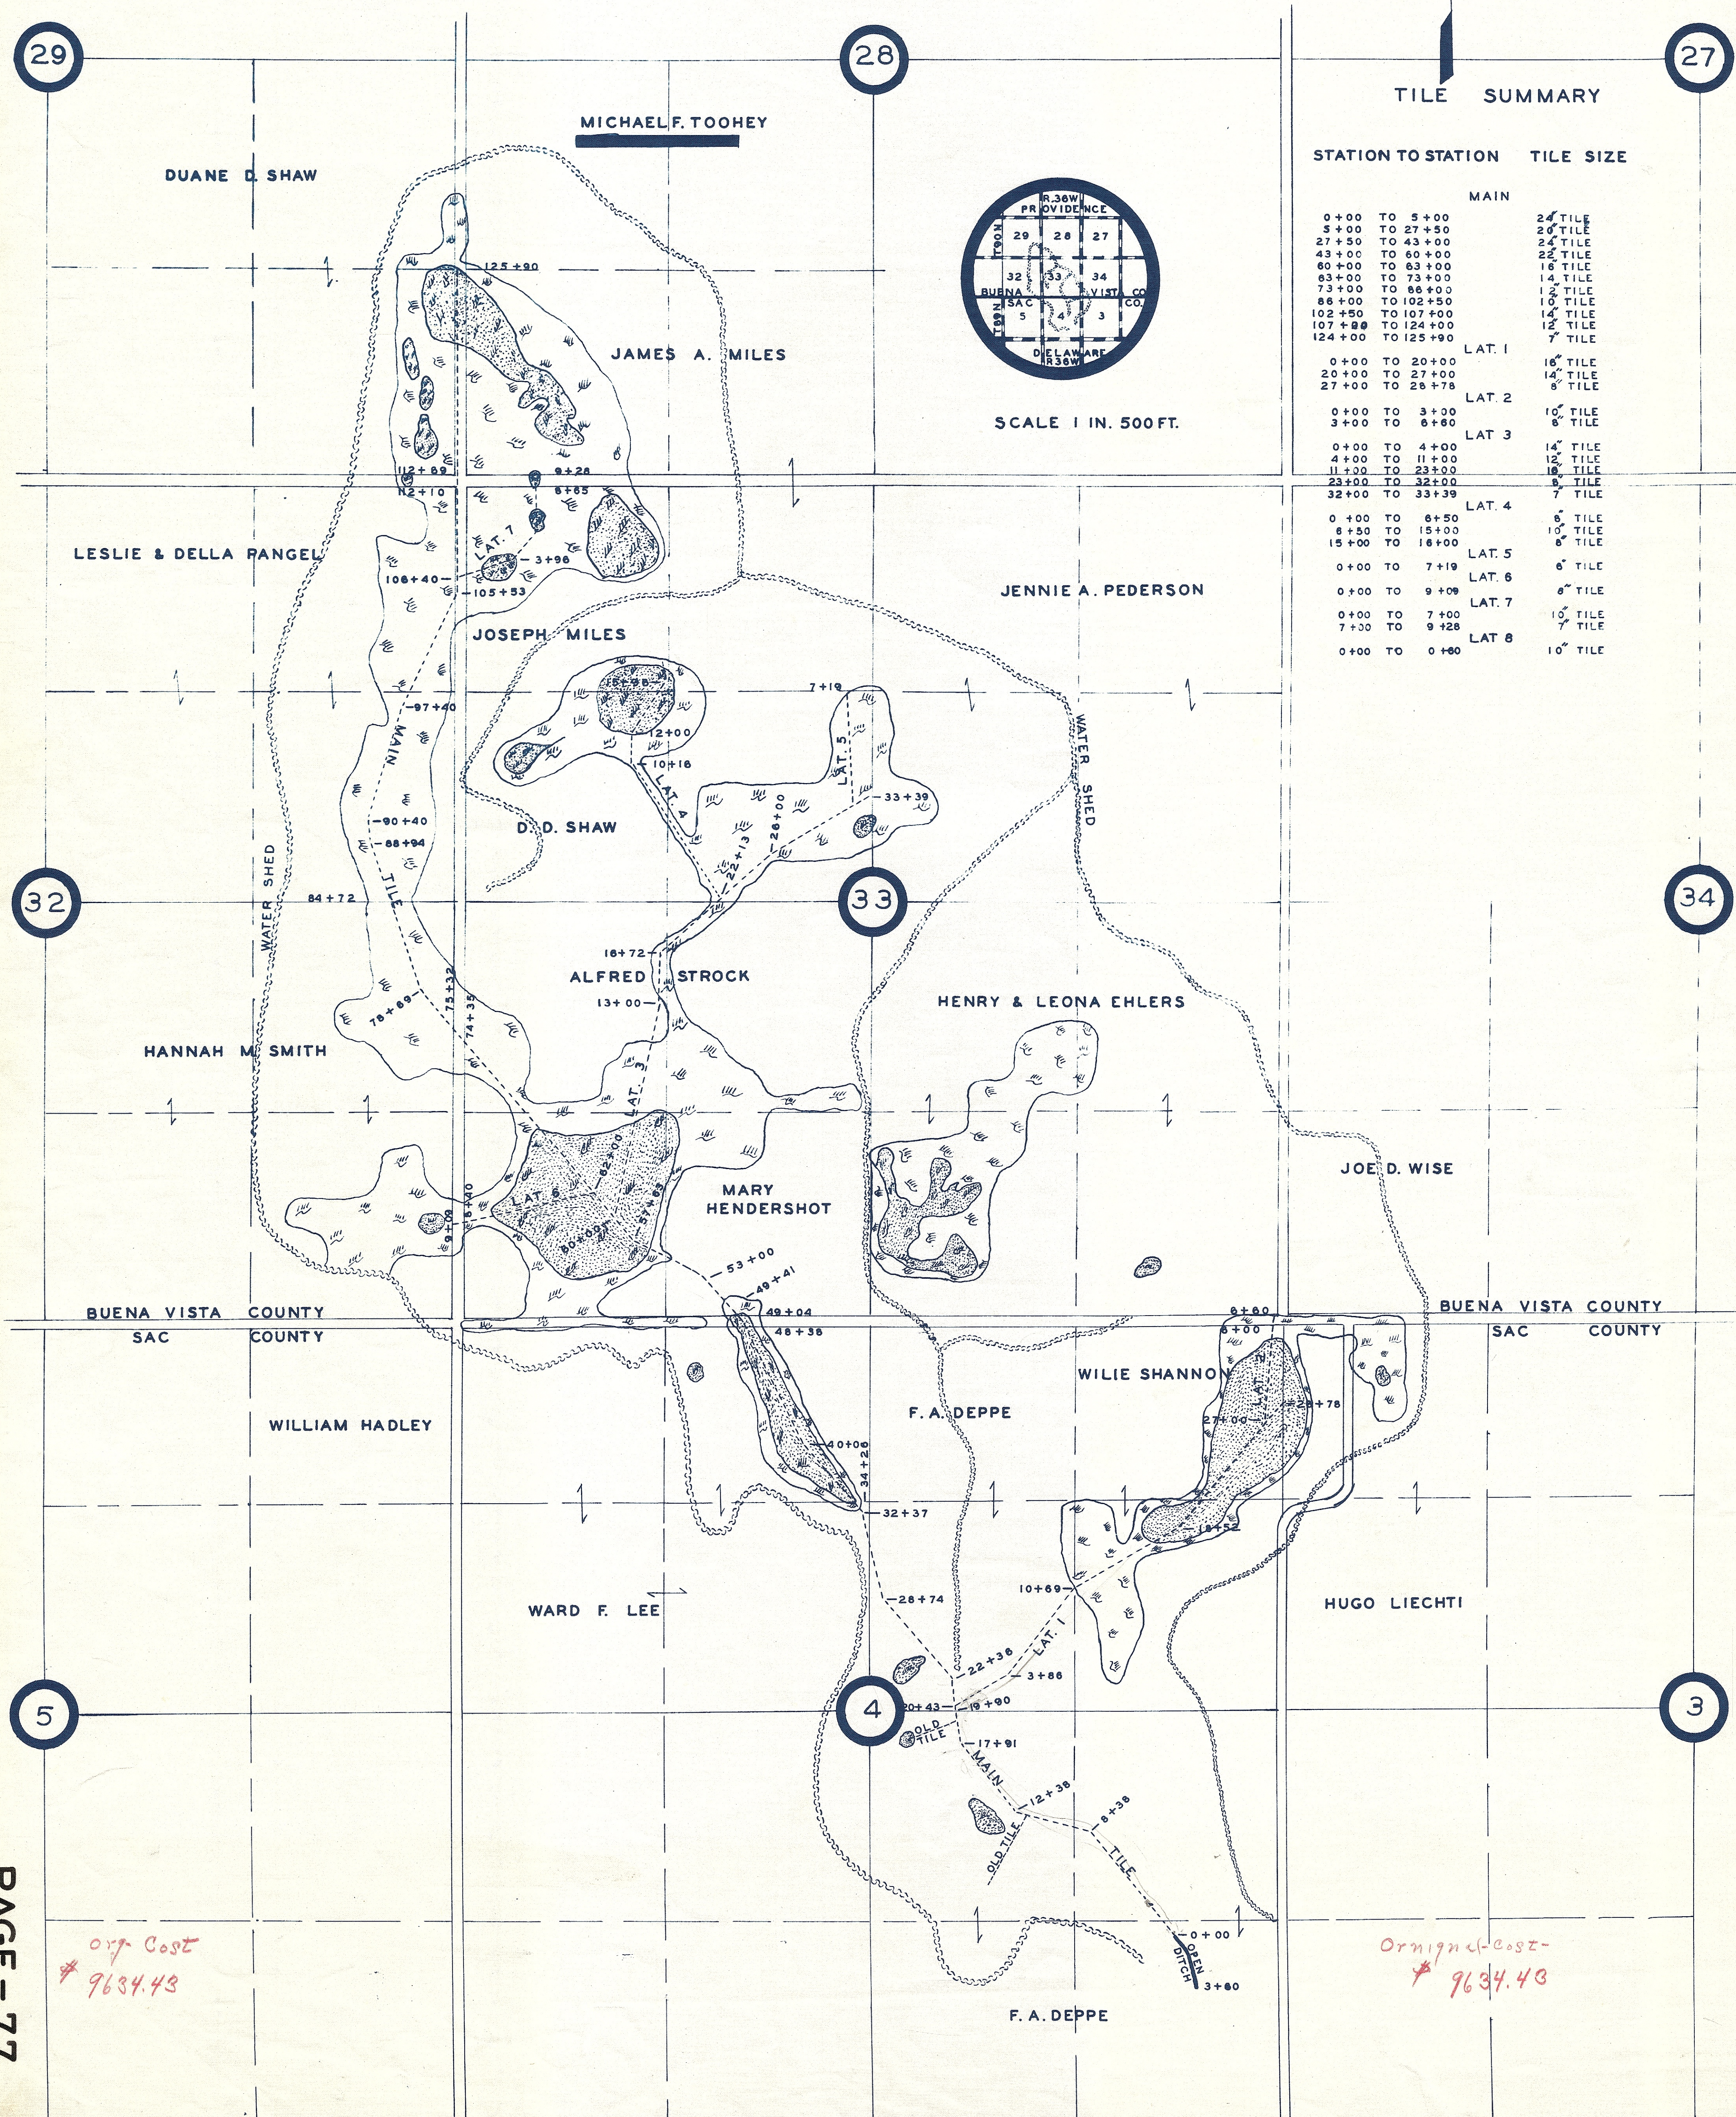

TILE SUMMARY

STATION TO STATION TILE SIZE

MAIN		
0+00 TO 5+00	24" TILE	
5+00 TO 27+50	24" TILE	
27+50 TO 43+00	24" TILE	
43+00 TO 60+00	22" TILE	
60+00 TO 63+00	18" TILE	
63+00 TO 73+00	14" TILE	
73+00 TO 86+00	12" TILE	
86+00 TO 102+50	10" TILE	
102+50 TO 107+00	14" TILE	
107+00 TO 124+00	12" TILE	
124+00 TO 125+00	7" TILE	
LAT. 1		
0+00 TO 20+00	16" TILE	
20+00 TO 27+00	14" TILE	
27+00 TO 28+78	8" TILE	
LAT. 2		
0+00 TO 3+00	10" TILE	
3+00 TO 8+60	8" TILE	
LAT. 3		
0+00 TO 4+00	14" TILE	
4+00 TO 11+00	12" TILE	
11+00 TO 23+00	10" TILE	
23+00 TO 32+00	8" TILE	
32+00 TO 33+39	7" TILE	
LAT. 4		
0+00 TO 6+50	6" TILE	
6+50 TO 15+00	10" TILE	
15+00 TO 16+00	8" TILE	
LAT. 5		
0+00 TO 7+19	6" TILE	
LAT. 6		
0+00 TO 9+08	8" TILE	
LAT. 7		
0+00 TO 7+00	10" TILE	
7+00 TO 9+28	7" TILE	
LAT. 8		
0+00 TO 0+80	10" TILE	

orig cost
\$ 9634.43

Original cost-
\$ 9634.43